



6+



16




2,2m



1 = 9,02m
2 = 4,38m
3 = 3,4m



Physical inclusion
Sensory inclusion
Cognitive inclusion

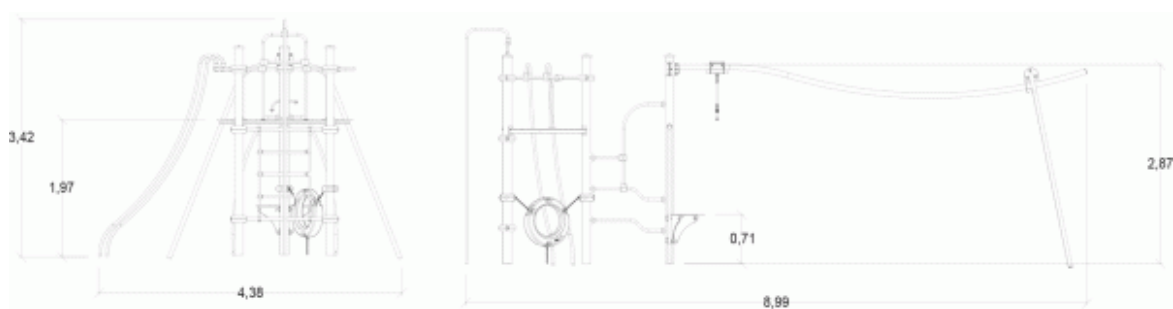

Play value : **10**

sliding



x2

meeting



x1

resting



x1

hanging



x1

balancing



x1

climbing




x2

getting across



x2

Components

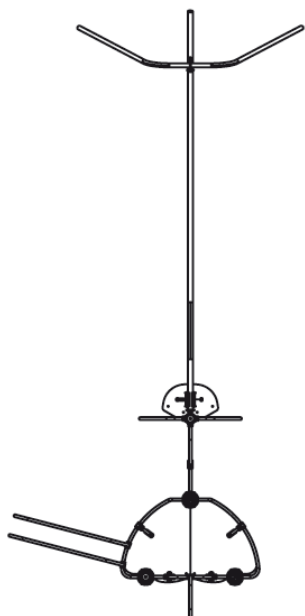


- ❶ Gamma tower
- ❷ Delta Straight ladder
- ❸ Fireman's pole
- ❹ Speed slide
- ❺ tele IXO
- ❻ Vertical buoy

Installation of equipment

IMPORTANT: It is essential to refer to the installation instructions for information on the size of the safety areas.

- Impact area (minimum normative surface)
- - - Free space

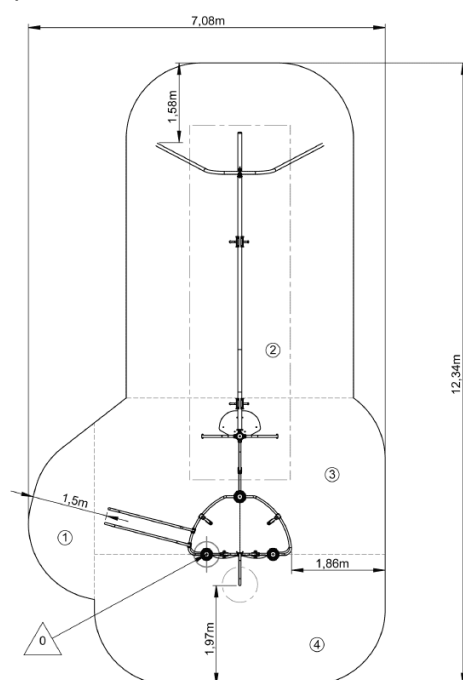

1	0,6m	3,5m ²
2	1m	29m ²
3	1,95m	17,5m ²
4	2,2m	14m ²



2

06h00

0.5m³

64m²

285kg

42kg

EN

1176